


NOTES:
 Based upon the Ordnance Survey map with permission of The Controller of Her Majesty's Stationery Office. © Crown Copyright.
 Aspect Landscape Planning Ltd, West Court, Hardwick Business Park, Nosal Way, Banbury OX16 2AF.
 Licence 100045345
 Copyright reserved

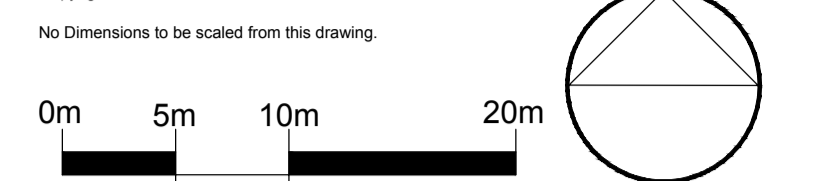

- KEY:**
- Site Boundary
 - Existing Shrubs Retained
 - Semi Mature Tree
 - Select Standard, Heavy Standard & Advanced Nursery Stock Clear Stem Trees
 - Bare Root Feather Tree Planting
 - Wildflower Mix
 - Amenity Grass Areas Re-seeded & made good where required.
 - Existing trees / woodland retained
 - Bulb Planting

Note: allow for a 1m wide mown strip adjacent to hard standing areas where wild meadow planting is specified

PLANTING NOTES:
 All plants to be supplied in accordance with the HTA National Plant Specification and from a HTA certified nursery. All plants and trees to be planted in accordance with BS3938. Delivery and handling of all plant material to be in accordance with BS4426/20/LCPSE Code of Practice for Handling and Establishing Landscape Plants Parts 1, 2 and 3. All excavated areas to be backfilled with either site won topsoil or imported topsoil to be BS3882 General purpose grade. All topsoiled areas to be clear of rocks and rubble larger than 50mm diameter and any other debris that may interfere with the establishment of plants. All plants shall be planted in a random fashion avoiding formal regimented lines at densities indicated in the schedule, unless otherwise specified. Unless otherwise specified, all hedgerows shall be planted in a double staggered rows and hedgerow mixes shall be planted in groups of 7, 9 & 13s at densities indicated on the schedule. Ornamental shrub planting mixes shall be planted in groups of 5, 7 & 11s and native shrub planting mixes shall be planted in groups of 9, 13 & 15s. All plants shall be watered in to field capacity immediately after planting and mulched with 50mm depth of medium grade crushed mulch. All trees to be double staked with cross bar and tied, using 1.5m long, 25mm diameter rounded tree stakes 75mm brack, rubber tie and spacer block. Stakes not to extend more than 650mm above ground level. All trees within hardstanding/highways visibility splays to be clear stem to 1.5m high unless otherwise specified. Planting and associated operations shall comply with BS4426, BS4429 and BS5537. Root barriers (Rebutol 1000 or equivalent) to be included adjacent to buildings and services where necessary. Unless otherwise stated planting shall be carried out during the period of 1 Nov to 31 March when the ground is not frozen or water logged. If planting is required outside this period agreement shall be sought and all bare root plants shall be substituted with container grown stock. All Fraxinus species to be UK-grown specimens from healthy, disease-free stock and from reputable suppliers and HTA certified nurseries.

PROTECTION OF EXISTING VEGETATION TO BE RETAINED:
 Existing trees to be retained shall be protected in accordance with BS5537, from commencement to completion of all works on site.

REV	DATE	NOTE	Drawn	CHK'd
P	29.11.18	Amended to Biodiversity Officer's comments	JM	
O	21.11.18	Planting updated to accommodate updates to hard surfacing plans.	JM	

aspect landscape planning

TITLE
**Upper Rissington
 Amenity Play 1 of 3 Planting Plan**

CLIENT
Bovis Homes and Linden Homes

SCALE	DATE	DRAWN
1:500@A1	JUL 2013	CW
DRAWING NUMBER	REVISION	
5109/ PP01	P	

